

AI-Assisted Vision People Counter

PRO1™



Product Code: FC-F3DP15

AI POWERED 2D VISION PEOPLE COUNTING

- Unparalleled Accuracy of Up to 99.5%
- Real-time Occupancy Counting
- Excellent Lifespan MBTF 25 years
- Bi-directional Counting
- Accurate Counting with Video Proof

STAFF EXCLUSION

- Automated staff counting using the AI-powered re-identification function requires no pre-registration, accessories, or unique uniforms.

OPTIMISED FOR ALL ENVIRONMENTS

- One lens fits all heights, caters for different types of stores with varying ceiling heights, as low as 2.1m to 6.0m.
- Widest Coverage. Equipped with 180 degree fisheye lens, reduce the total number of counters required.
- Superior Heat Dissipation. Enclosed in an aluminium unibody casing, prolong the lifespan of electronic components.
- Low-light/ Night Mode Counting with External Infrared Light
- Water Leakage-Proof. Enclosed in splash proof casing to reduce the counter failure rate due to the common issues like water leakage on the ceiling.

EASY TO INSTALL AND SET UP

- More Compact Form Factor
- 1-year Manufacturer Warranty

TECHNICAL DATA


Device Dimension (mm)	154 (W) x 59 (D) x 40 (H)
Packing Dimension (mm)	200 (W) x 170 (D) x 50(H)
Weight	Device: 0.4 kg Packing: 0.86 kg
Camera	1x 5MP, 180°, 1/2.8" IMX335 CMOS Sensor
Illumination	0 Lux (With IR Illuminator)
Frame Rate	25 fps
Indicator	RGB LED status indicator
Casing	Made by Aluminium oxide alloy for dust resistance with 1mm tempered glass lens-covering.
IP Rating	IP64
Ideal Mounting Height	2.1 metres – 6.0 metres
Operating Environment	Temperature 10°C to 65°C, Humidity 10% to 90%, Comprehensive lightning protection
Storage Environment	Temperature -40°C to 70°C, Humidity 10% to 95%
Tracking Technology	FFC VeyonTrack
Field Upgradable	Manual / Auto Software upgrade
Power Over Ethernet	Yes (IEEE802.3at)
PoE Mode	Mode A/B
Voltage	48~56 VDC
Power Consumption	6W
Cabling	Cat5e/Cat6, 100Mbps RJ45
Origin	Made in the UK

FIRMWARE SPECIFICATION FOR DEVICE LEVEL

Interface	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Levels	2 levels: Administrator, Standard Users
Operating System	Footfall Counter OS
Ethernet	10/100 Mb Ethernet
Data Delivery	TCP/IP
Data Storage on counter level	Hourly Data: 300 days; Raw Data: 7 days; 3 days *Data which has sent to server will keep permanently in server level
Data Backup	Yes
Firmware Feature	Secure Operating System with Multicore Processor, Device Health Check
Data Upload to Server	Every Hour
Average Data Transfer Rate*	10.0 kilobytes/hour

*Average Data Transfer Rate is measured with a predefined sample size of 20 requests per hour

PRODUCT DIMENSION

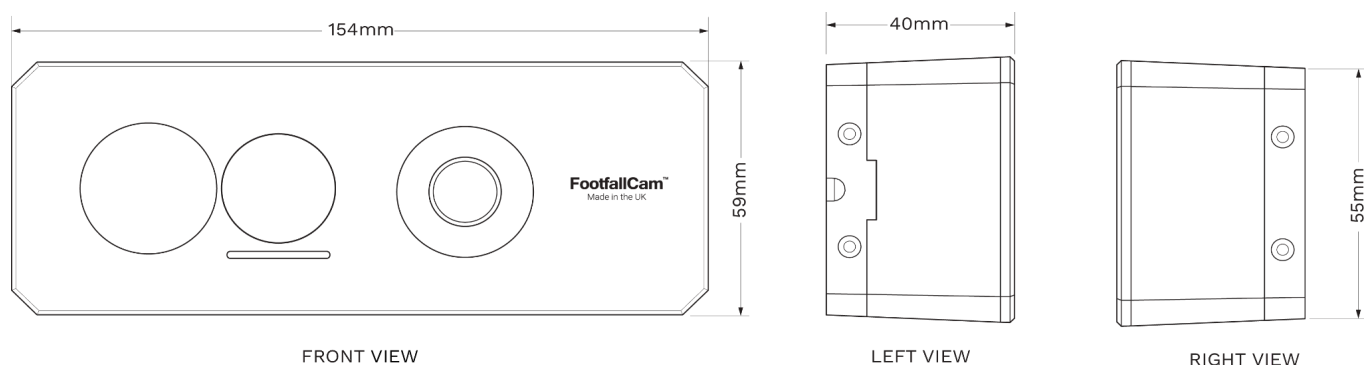

Wide Field of View (FOV) - 160°



COVERAGE TABLE

Ceiling Height (m)	Lens Degree	Entrance Width (m) ^[1]	Coverage Width (m) ^[2]	Coverage Area (m ²) ^[3]
2.1	160	4.36m	4.85m	18.47m ²
2.2	160	4.57m	5.08m	20.27m ²
2.3	160	4.78m	5.31m	22.15m ²
2.4	160	4.99m	5.54m	24.12m ²
2.5	160	5.20m	5.77m	26.17m ²
3.0	160	6.23m	6.93m	37.68m ²
3.5	160	7.27m	8.08m	51.29m ²
4.0	160	8.31m	9.24m	67.00m ²
4.5	160	9.35m	10.39m	84.79m ²
5.0	160	10.39m	11.54m	104.68m ²
5.5	160	11.43m	12.70m	126.66m ²
6.0	160	12.47m	13.85m	150.74m ²

Notes:


^[1] **Entrance width (m)** - Used to estimate the device coverage for **Entrance Counting**

^[2] **Coverage width (m)** - The maximum width of device coverage for **In-Store Analytics**

^[3] **Coverage area (m²)** - Used to estimate the device coverage for **In-Store Analytics**

For mounting height >6.00m, recommended to use drop pole when installing the counter to the acceptable range

AI-Powered Re-Identification

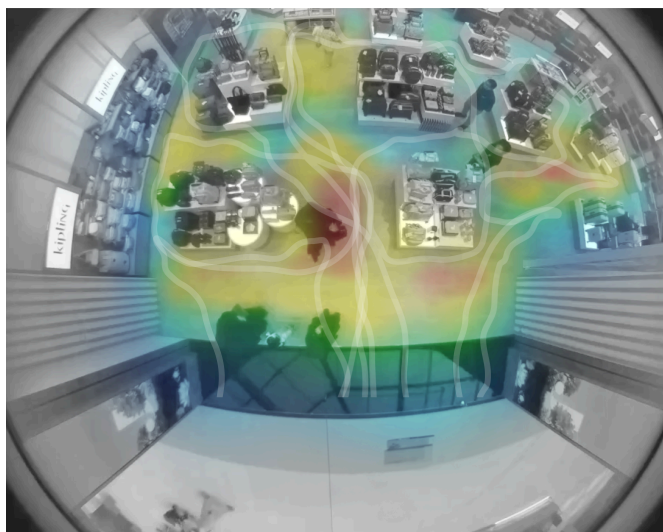

Footfall Profiling

- Demographic Analysis
- Unique Visitors: Discount visitors who have re-entered the store within the last 15 minutes.

In-Store Analytics

- Heatmap
- Store-wide Path Tracking
- Customer Engagement: Measure the passer-by, engaged visitors and engaged duration for each area.
- Shopper Type Categorisation: Based on the shopping journey and shoppers' behaviour

Automatic Staff Exclusion

- ✗ No Tags
- ✗ No Staff Pre-Registration
- ✗ No Designated Walk Paths for Staffs
- ✗ No Unique Uniform